




Neighborhood Watch Sign Installation Guidelines

STATE LAW AND COUNTY ORDINANCE CONTROL THE INSTALLATION OF NEIGHBORHOOD WATCH SIGNS. SIGNS NOT ERECTED BY THESE STANDARDS WILL BE REMOVED. SIGNS CANNOT BE PLACED IN THE MEDIAN.

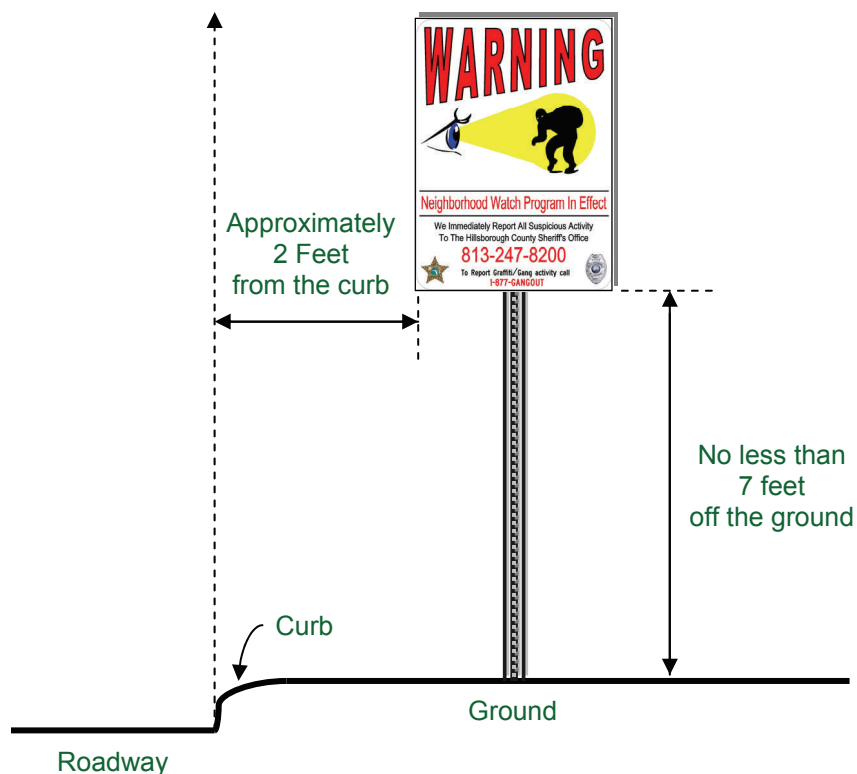

GENERAL GUIDELINES FOR PROPER INSTALLATION:

- Sign posts are provided free of charge by Hillsborough county. **Posts should be cemented into the ground, at least 2 to 3 feet deep, to deter theft.** (The posts are approximately 10 to 12 feet long, so please adjust accordingly.) When determining the location of the post, remember that the edge of the signage should be approximately two feet from the edge of the curb.
- Signs should be attached to the post with carriage bolts. **The threads on bolts should be damaged so that the nuts cannot be removed, to deter theft.** When mounting a sign to the post, remember that the bottom of the sign should hang no lower than seven feet from the ground.
- Signs should be erected on private property, between the first and second house from the corner. In rural areas, the sign should be placed in front of the first occupied residence on the road.